



Pressure relief solenoid-operated On/Off valve, direct acting

SR1E2-A2

3/4-16 UNF • Q_{\max} 1.5 l/min (0.40 GPM) • p_{\max} 350 bar (5100 PSI)

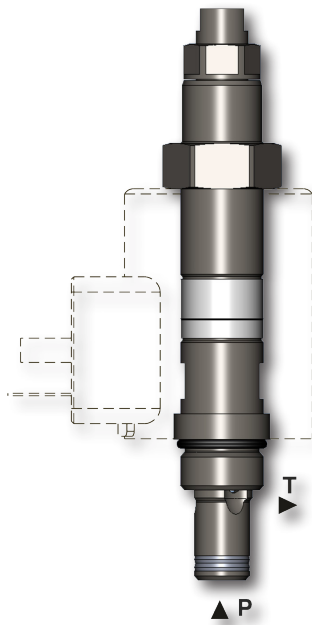

Symbol



Technical Features

- › Screw-in cartridge direct acting pressure relief valve used as a pilot valve or a valve for small flow rate up to 1.5 l/min
- › Solenoid operated remote switching between minimum and maximum set pressure
- › Possible combined function of pressure relief and unloading valve
- › Five pressure ranges with a maximum settable pressure of 350 bar
- › Accurate pressure control
- › Easily interchangeable solenoid coil and easy connector positioning
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227. Enhanced surface protection for mobile sector available for the steel parts (ISO 9227, 520 h salt spray)

Functional Description

Screw-in cartridge pressure valve, direct acting, is used as a pilot valve for pressure valves SR4E2-B2 and SP4E1-B3 or as a direct acting pressure relief valve for small flow rate up to 1,5 l/min. The input system pressure is permanently compared with mechanically adjusted cracking pressure. The system pressure higher than set cracking pressure opens the valve and unloads the circuit by connection to the tank. The valve thus protects the connected circuit against pressure overloading. Additionally, it is possible to mechanically adjust two values of cracking pressure with the help of adjusting screws built into the end plug of the solenoid actuating system. The two set pressure values can be remotely switched by solenoid. When the solenoid is switched on the valve is set to maximum pressure. The maximum adjustable pressure is defined by pressure range of valve. The minimum circuit pressure can be set from 0 bar to the set maximum pressure. The valve can be used in two ways – as a switcher between two set pressure values or as a combined relief – unloading valve when one pressure value is adjusted on min. system pressure 7 bar. The complete valve consists of direct acting poppet valve with connecting thread 3/4-16 UNF and a control solenoid with two adjusting screws.


CAUTION: A pressure change in T channel will cause a change of the set cracking pressure of 1:1.

Technical Data

Valve size / Cartridge cavity		3/4-16 UNF-2A / A2 (C-8-2)
Max. flow	l/min (GPM)	1.5 (0.40)
Max. operating pressure (port P)	bar (PSI)	350 (5080)
Max. operating pressure (port T)	bar (PSI)	100 (1450)
Min. adjustable pressure	bar (PSI)	0
Fluid temperature range (NBR)	°C (°F)	-30 ... +80 (-22 ... 176)
Fluid temperature range (FPM)	°C (°F)	-20 ... +80 (-4 ... 176)
Ambient temperature range (NBR)	°C (°F)	-30 ... +50 (-22 ... 122)
Ambient temperature range (FPM)	°C (°F)	-20 ... +50 (-4 ... 122)
Supply voltage tolerance	%	AC, DC \pm 10
Max. switching frequency	1/h	5 000
Weight	kg (lbs)	0.44 (0.97)
Mounting position: If possible, the valve should be mounted with the coil vertically downward.		
		Datasheet
General information		GI_0060
Coil types		C_8007
Valve bodies	In-line mounted	SB_0018
	Sandwich mounted	SB-04(06)_0028
Cavity details / Form tools		SMT_0019
Spare Parts		SP_8010
		Type
Products and operating conditions		C 19B*
		SB-A2*
		SB-*A2*
		SMT-A2*

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Relief pressure related to flow rate

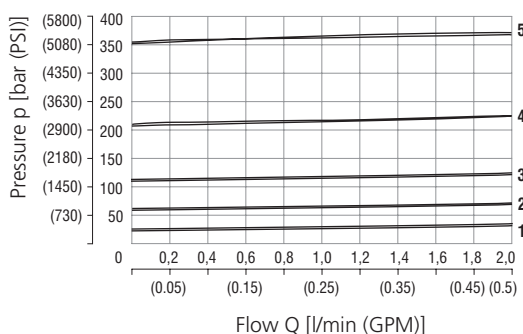

Pressure range	3	6	12	21	35
	1	2	3	4	5

Example showing the adjustable pressures p_1 and p_2 ($p_1 \geq p_2$)

p_1 (p_{\max} , relief pressure) is set as the higher working pressure (solenoid energized)
 p_2 (p_{\min} , vented pressure) is set as a lower working pressure (solenoid de-energized)

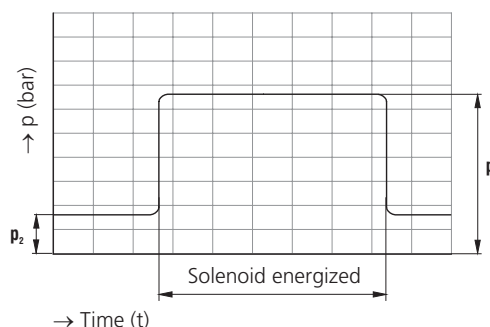


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Application example

Pressure drop related to flow rate

0 % of control current, P-T direction

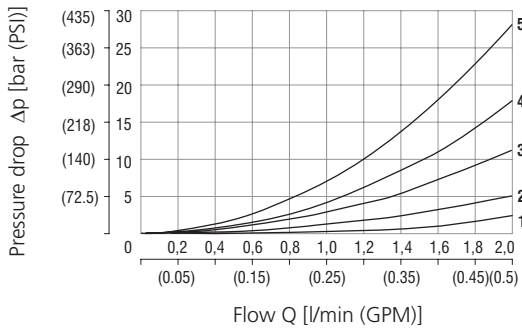


Pressure range	3	6	12	21	35
	1	2	3	4	5

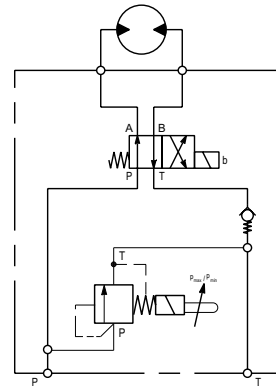

The valve is used to unload a pump to tank with a very low pressure drop. This results in less heating of the oil and therefore lower energy costs for the user.

p_1 (p_{max}) must be set before p_2 (p_{min}). To set p_1 , the solenoid is energized and the pressure adjusted with a flat wrench (size 10). The solenoid is then de-energized and the lower pressure adjusted with an allen key (hex. 3).

Dimensions in millimetres (in)

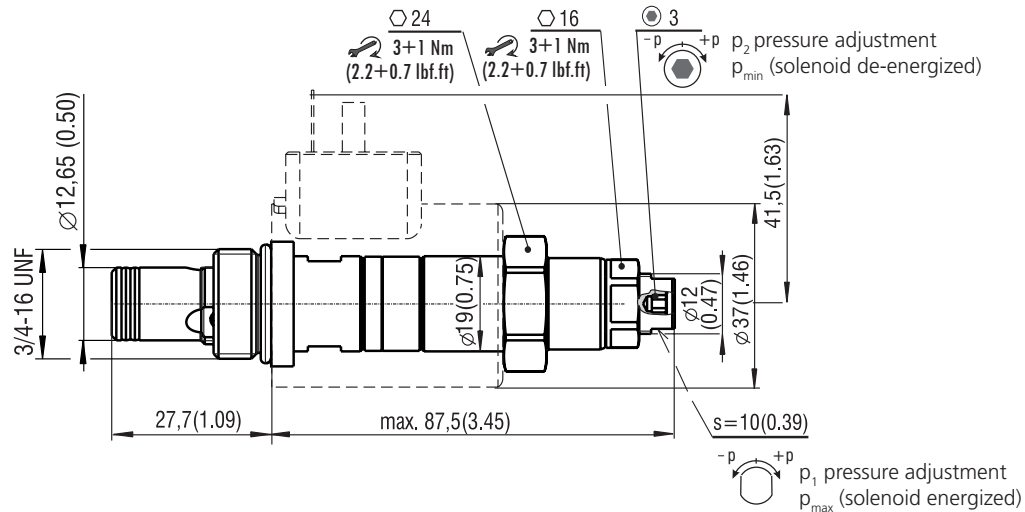

Ordering Code

SR1E2 - A2 / H -

Pressure relief solenoid-operated On/Off valve, direct acting

Valve cavity
3/4-16 UNF (C-8-2)

Model
High performance

Max. reduced pressure
up to 30 bar (435 PSI) **3**
up to 60 bar (870 PSI) **6**
up to 120 bar (1740 PSI) **12**
up to 210 bar (3046 PSI) **21**
up to 350 bar (5076 PSI) **35**

Surface treatment

A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

No designation
V

Seals
NBR
FPM (Viton)